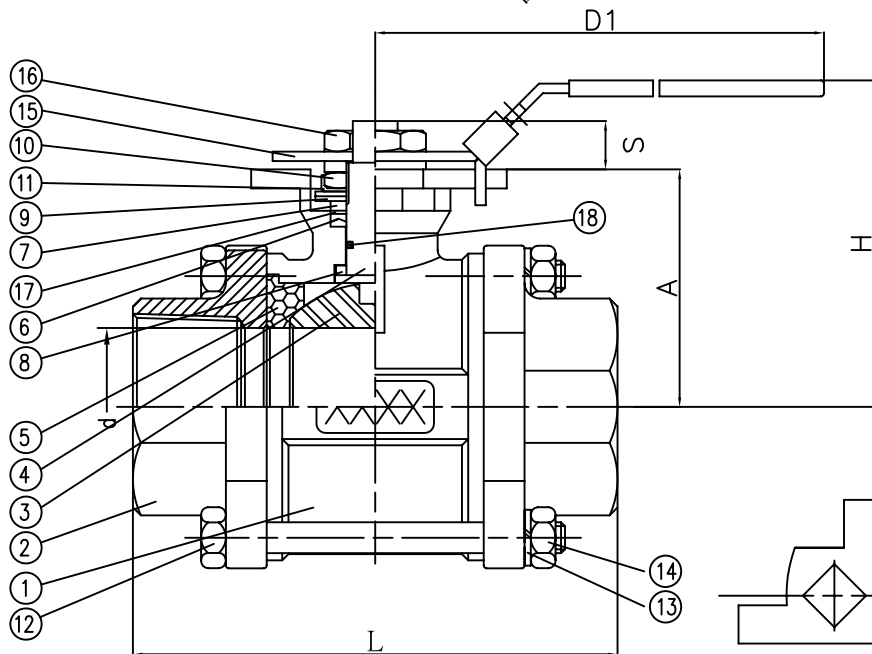
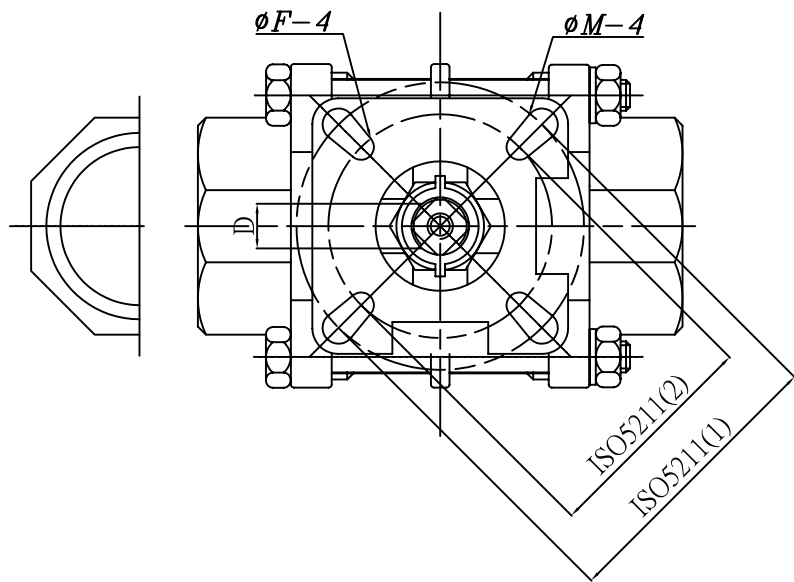


SIZE	d	L	ϕF	ϕM	ISO 5211		in-lb	D	H	D1	S	A
1/4"	11.5	63.5	6.0	6.0	36	42	17.4	9.0	72.95	112.0	8.5	36.95
					F03	F04						
3/8"	12.5	63.5	6.0	6.0	36	42	17.4	9.0	72.95	112.0	8.5	36.95
					F03	F04						
1/2"	15.0	63.5	6.0	6.0	36	42	43.5	9.0	72.95	112.0	8.5	36.95
					F03	F04						
3/4"	20.0	72.5	6.0	6.0	36	42	69.5	9.0	80.8	112.0	8.5	45.0
					F03	F04						
1"	25.0	81.0	6.0	7.0	42	50	95.5	11.0	90.45	136.0	11.4	53.45
					F04	F05						
1 1/4"	32.0	94.5	6.0	7.0	42	50	130.2	11.0	98.65	185.0	11.4	58.95
					F04	F05						
1 1/2"	38.0	108.0	7.0	9.0	50	70	217	14.0	115.25	197.9	14.0	74.75
					F05	F07						
2"	50.0	121.5	7.0	9.0	50	70	286.5	14.0	124.0	197.9	13.7	83.5
					F05	F07						
2 1/2"	65.0	157.5	9.0	11.0	70	102	607.6	17.0	155.0	264.0	18.0	108.75
					F07	F10						
3"	80.0	190.0	9.0	11.0	70	102	737.8	17.0	208.5	264.0	18.0	118.25
					F07	F10						
4"	100.0	225.0	11.0	13.0	102	125		22.0	216.7	325.0	23.0	153.75
					F10	F12						

NO.	PART NAME	MATERIAL		QTY
		STAINLESS STEEL	CARBON STEEL	
1	BODY	ASTM A351 Gr.CF8M	ASTM A216 WCB	1
2	CAP	ASTM A351 Gr.CF8M	ASTM A216 WCB	2
3	BALL	ASTM A351 Gr.CF8M	ASTM A351 Gr.CF8M	1
4	STEM	S.S.316	S.S.316	1
5	BALL SEATS	RPTFE / 15% G.F.	RPTFE / 15% G.F.	2
6	STEM PACKING	RPTFE / 15% G.F.	RPTFE / 15% G.F.	1
7	GLAND BUSH	S.S.304	S.S.304	1
8	THRUST WASHER	RPTFE / 15% G.F.	RPTFE / 15% G.F.	1
9	BEVELILLE WASAER	SUS304-CSP	SUS304-CSP	1
10	HANDLE NUT	S.S.304	S.S.304	1
11	STOP	S.S.304	S.S.304	1
12	BOLTS	S.S.304	S.S.304	4-6
13	BOLTS WASHER	S.S.304	S.S.304	4-6
14	BOLTS NUTS	S.S.304	S.S.304	4-6
15	HANDLE	S.S.304	S.S.304	1
16	HANDLE NUT	S.S.304	S.S.304	1
17	THRUSP WASHER	RPTFE / 25% G.F.	RPTFE / 25% G.F.	1
18	O-RING	VITON	VITON	1

STANDARD 45°										MOUNTING PAD ISO 5211:2001(E)				REV	B
								Thread End	MATERIAL	APPROVE		CHECK		DRAWN BY	Peggy
										SCALE	FREE	UNIT	mm	DATE	2004.07.30
										PART NO.	AF-33			Q'TY	
										OTHER	DWG NO		TITLE	3-PC BALL VALVE	
			REV	DATE	DESCRIPTION			CODE	REVISER	REMARKS	 Anson Flow Corp.				