


M12 CONNECTORS WITH PUR MOULDED CABLE

M12 CONNETTORI CON CAVO COSTAMPATO PUR

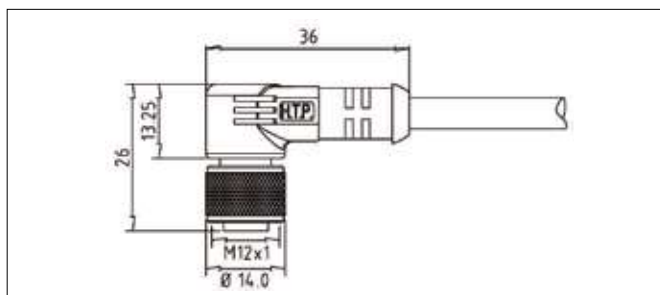

M12 male/female with cable, angled 90°/straight 180° Number of contacts: 3/4/5/8/12 poles Cable material: PUR Cable colour: black Housing color: black Cable lenght: on request Conductor size: 0,34 max. Standard: IEC 61076-2-101 (Ed. 1) / IEC 60947-5-2	PRODUCT DESCRIPTION	M12 maschio/femmina con cavo, angolato 90°/dritto 180° Numero di contatti: 3/4/5/8/12 poli Materiale cavo: PUR Colore cavo: nero Colore custodia: nero Lunghezza cavo: su richiesta Sezione conduttori: 0,34 max. Standard: IEC 61076-2-101 (Ed. 1) / IEC 60947-5-2
	DESCRIZIONE PRODOTTO	
Rated voltage: 250V AC/DC (3,4p.), 60V AC/DC (5p.) 30V AC/DC (8p.), 30V AC/DC (12p.) Rated current: 4A (3,4,5p.), 2A (8p.), 1,5A (12p.)	TECHNICAL DATA	Tensione operativa: 250V AC/DC (3,4p.), 60V AC/DC (5p.) 30V AC/DC (8p.), 30V AC/DC (12p.) Corrente operativa: 4A (3,4,5p.), 2A (8p.), 1,5A (12p.)
	DATI TECNICI	
Contact material: brass AU gold plated Housing material: polypropylene Coupling nut material: nickel-plated brass O-Ring: NBR	MATERIALS	Materiale dei contatti: ottone AU gold plated Materiale custodia: polipropilene Materiale ghiera: ottone nichelato O-Ring: NBR
	MATERIALI	
Protection class (IEC 60529): IP 69K Temperature range: -25°C to + 90°C	ENVIRONMENTAL CONDITIONS	Grado di protezione (IEC 60529): IP 69K Range temperatura: -25°C to + 90°C
	CON. AMBIENTALI	
Plastic bag (1 piece)	PACKAGING IMBALLAGGIO	Sacchetto di plastica (1 pezzo)

DESCRIPTION DESCRIZIONE	TYPE TIPO	MODEL MODELLO	POLES POLI	CONDUCTORS CONDUTTORI	LENG. OF CABLE LUNG.CAVO	CODE CODICE	DESCRIPTION DESCRIZIONE	TYPE TIPO	MODEL MODELLO	POLES POLI	CONDUCTORS CONDUTTORI	LENG. OF CABLE LUNG.CAVO	CODE CODICE
M12	F	90°	3	3x0,34 mm ²	1 m	12FA3D1Z	M12	M	90°	3	3x0,34 mm ²	1 m	12MA3D1Z
M12	F	90°	4	4x0,34 mm ²	1 m	12FA4D1Z	M12	M	90°	4	4x0,34 mm ²	1 m	12MA4D1Z
M12	F	90°	5	5x0,34 mm ²	1 m	12FA5D1Z	M12	M	90°	5	5x0,34 mm ²	1 m	12MA5D1Z
M12	F	90°	8	8x0,25 mm ²	1 m	12FA8C1Z	M12	M	90°	8	8x0,25 mm ²	1 m	12MA8C1Z
M12	F	90°	12	12x0,14 mm ²	1 m	12FA12H1Z	M12	M	90°	12	12x0,14 mm ²	1 m	12MA12H1Z
M12	F	Straight/Dritto	3	3x0,34 mm ²	1 m	12FD3D1Z	M12	M	Straight/Dritto	3	3x0,34 mm ²	1 m	12MD3D1Z
M12	F	Straight/Dritto	4	4x0,34 mm ²	1 m	12FD4D1Z	M12	M	Straight/Dritto	4	4x0,34 mm ²	1 m	12MD4D1Z
M12	F	Straight/Dritto	5	5x0,34 mm ²	1 m	12FD5D1Z	M12	M	Straight/Dritto	5	5x0,34 mm ²	1 m	12MD5D1Z
M12	F	Straight/Dritto	8	8x0,25 mm ²	1 m	12FD8C1Z	M12	M	Straight/Dritto	8	8x0,25 mm ²	1 m	12MD8C1Z
M12	F	Straight/Dritto	12	12x0,14 mm ²	1 m	12FD12H1Z	M12	M	Straight/Dritto	12	12x0,14 mm ²	1 m	12MD12H1Z