

3PC Ball Valve With Direct Mounting Pad 1000WOG

Threaded Ball Valves




FEATURES:

Anti-Static Devices For Ball- Stem- Body
Blow-out Proof Stem
Pressure Balance Hole In Ball Slot
Built In ISO 5211 Direct Mounting Pad For Easy Automation

STANDARDS:

Design: ASME B16.34
Wall Thickness: ASME B16.34
Pipe Thread: ASME B1.20.1, BS21
DIN 2999/259, ISO 228/1 JIS B 0203, ISO 7/1
Butt Weld: ASME B16.25
Socket Weld: ASME B16.11
Inspection & Testing: MSS SP-110, EN 1226


No.	PARTS NAME	MATERIAL		
1	Body	CF8M	CF8	WCB
2	Seat	PTFE/RPTFE		
3	Anti-Sataic Device	SUS304		
4	Cap	CF8M	CF8	WCB
5	Body Gasket	PTFE/RPTFE		
6	Spring Washer	SUS304		
7	Nut	SUS304		
8	Thrust Washer	PTFE		
9	O-Ring	VITON		
10	V-Ring Packing	PTFE/RPTFE		
11	Packing Gland	SUS304		
12	Belleville Waher	SUS301		
13	Stem Nut	A194-8		
14	Stop Cap	SUS304		
15	Washer	SUS304		
16	Stop Nut	SUS304		
17	Stem	SUS316/SUS304		
18	Handle	SUS304		
19	Plastic Pin	Plastic		
20	Locking Device	SUS301		
21	Handle Cover	Plastic		
22	Bolt	SUS304		

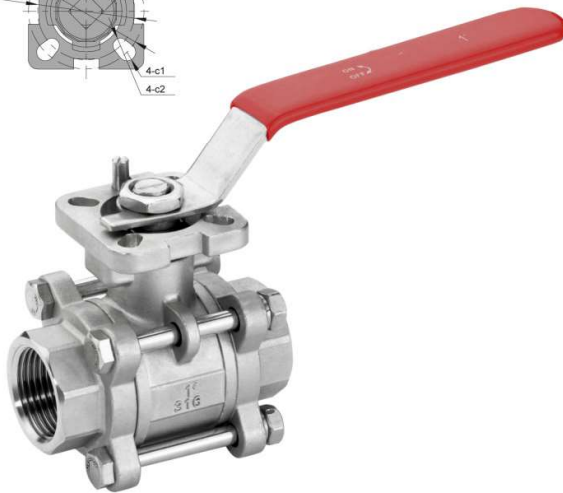

Butt Welding End



Soket End

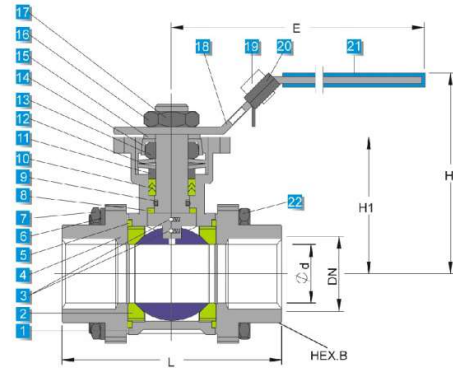

Unit:mm

DN	Ød	L	LB	H	H1	E	Ød1	Ød2	ØC1	ØC2	□P	ØB1	ØB2	ØS1
1/4"	10.5	50	70	58	26	98	42	36	6	6	9	12.5	18	14.2
3/8"	12	60	70	58	31	110	42	36	6	6	9	12.5	18	17.8
1/2"	15	75	75	67	40	110	42	36	6	6	9	16	22.5	21.8
3/4"	20	80	90	73	46	110	42	36	6	6	9	21	27	27.3
1"	25	90	100	88	57	160	50	42	7	6	11	26	34.5	34.0
1-1/4"	32	110	110	95	64	160	50	42	7	6	11	32	43	42.8
1-1/2"	38	120	125	107.5	71	185	70	50	9	7	14	38	49	48.9
2"	50	140	150	118.5	82	185	70	50	9	7	14	51	62	61.4
2-1/2"	65	185	190	168	98	305	102	70	11	9	17	65	76.5	74.0
3"	78	205	220	178	110	305	102	70	11	9	17	78	92	90.0
4"	100	240	270	198	130	305	102	70	11	9	17	100	115.5	115.4