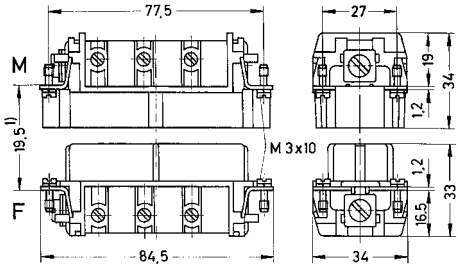




Number of contacts

 $6 + \text{Ⓢ}$

400/690 V
35 A

Identification	Wire cross section (mm²)	Part number		Drawing Dimensions in mm
		male	female	
Han® HsB, Screw terminal, silver plated contacts, contact resistance ≤1 mOhm 	1.5–6	09 31 006 2601	09 31 006 2701	 1) Distance for contact max. 21 mm Tightening torque axial screw 1.2 Nm  Contact arrangement (view from termination side)  Panel cut out for inserts for use without hoods/housings